

Installation

1) Remove the front speaker grille

2) Remove or breakthrough the 4 stickers covering over the 4 holes on the front of the soundbar with a pencil. Make sure that the pencil passes through the holes on the back of the soundbar (Fig. 1)

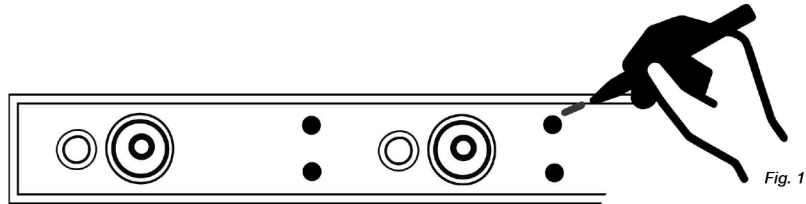


Fig. 1

3) Hold the soundbar up to the wall at the desired mounting location

4) Place a level on top of the soundbar. Once level, pass a pencil through the 4 exposed holes and mark their location on the wall (Fig. 2)

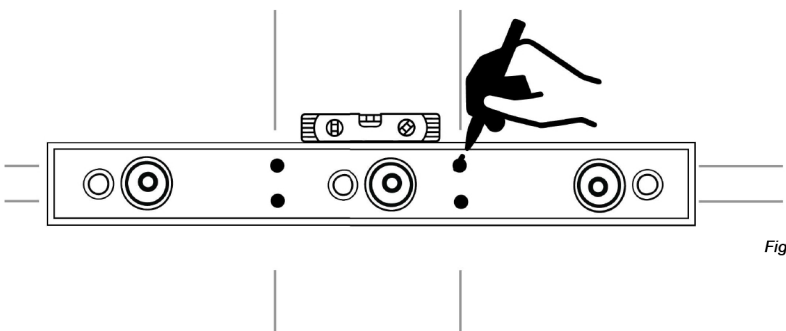


Fig. 2

5) Remove the soundbar and run the provided gasket tape around all four sides on the back of the soundbar, 1/4 inch from the edges

6) Use a stud finder to determine if the marked locations are over a stud or open area (Fig. 3)

Installation

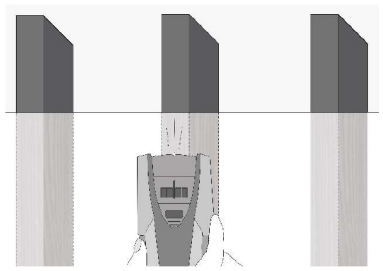


Fig. 3

7) If the marked locations are NOT over a stud, use the provided toggle bolts and anchor them into the wall at the marked locations

8) Run the speaker wire through the provided cable management channel on the back of the soundbar and wire into the applicable speaker terminals.

****You may need to strip the initial sheathing off of the speaker wire depending on which gauge wire you are using

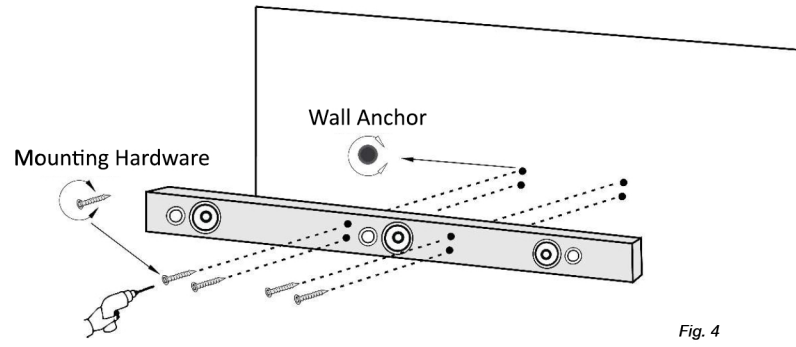


Fig. 4

9) Place the soundbar back onto the wall making sure to line the holes up with the marked locations while pushing the excess speaker wire back into the wall

10) Use the applicable hardware to mount the soundbar to the wall by passing through the 4 holes on the front of the bar into the wall anchors with bolts or studs with screws

11) Replace the front grille